



专用三脚架

- 兼容全系列自准直仪测量应用
- 选配的经纬仪安装附件
- 二段式伸缩支脚调节，可锁紧
- 张角大范围可调并锁紧
- 精密齿轮齿条结构升降中轴
- 附带安装孔的防滑地脚
- 可选的准直仪安装附件
- 中轴升降行程：330mm
- 最低工作高度：600mm
- 最高工作高度：1400mm

Tripod

- Designed for auto-collimators;
- Optional stand for Theodolite;
- 2-Stage lockable legs;
- Free open leg angles;
- Rack-Gear elevating pillar;
- Anti-skid ground support;
- Central pillar elevating range $\geq 330\text{mm}$;
- Minimum working height $\leq 600\text{mm}$;
- Maximum working height $\geq 1400\text{mm}$;

Weight : 5KG



高精度升降台 Elevating Table

- 100mm升降行程 (100mm elevating range);
- 0.01mm微调分辨率 (0.01mm resolution);
- 承重 10kg ($\geq 10\text{kg}$ load capacity);

台面尺寸：200mm×120mm
Weight : 2950g

PL100




二维调整工作台 2-Axis Adjustable Table


- 偏摆、俯仰独立可调 (Dual Axis adjustable);
- 双轴 $\pm 2^\circ$ 调整范围 ($\pm 2^\circ$ adjustment range);
- 1" 微调分辨率 (1" Resolution);
- 承重 50kg (≥ 50 kg load capacity);

工作台尺寸: 298mm(L)×196mm(W)
安装孔: 25mm×25mm中心距均布, M6规格
外形尺寸: 298mm(L)×232mm(W)×65mm(H)
Weight: 6.9KG

DM200

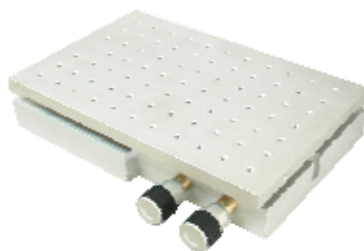

LS500

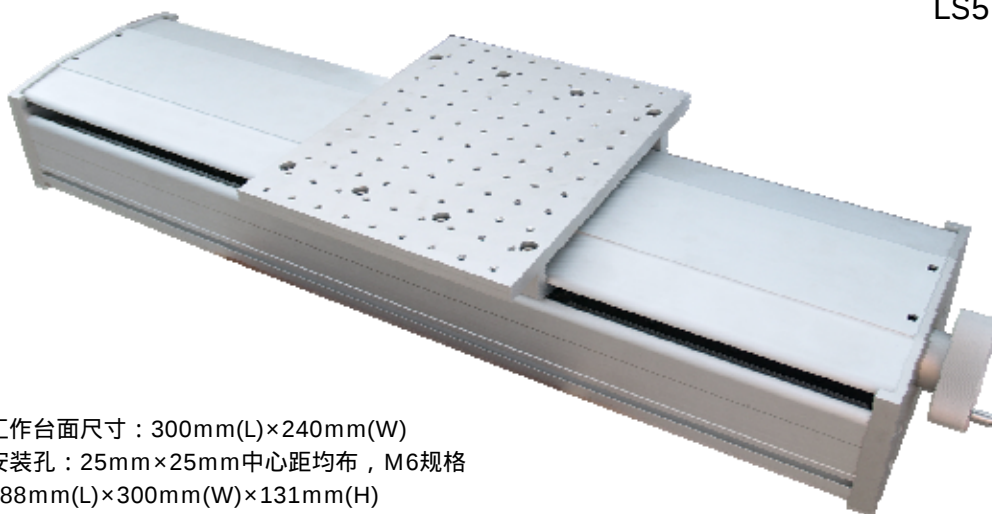

工作台尺寸: 300mm(L)×240mm(W)
安装孔: 25mm×25mm中心距均布, M6规格
888mm(L)×300mm(W)×131mm(H)
Weight: 25KG

精密直线平移工作台

- 精密直线导轨及丝杠传动
- 550mm大行程范围
- 手动轮调整, 5mm/360°
- 0.01mm微调分辨率
- 可选的电控升级件
- 承重 50kg

Precision Linear Stage

- Precision linear guide and leadscrew;
- ≥ 550 mm linear moving range;
- Manual move, 5mm/rotation;
- 0.01mm resolution;
- Optional parts for upgrade to motor drive;
- ≥ 50 kg load capacity;